

CALIBER 120 D

INGROUND / INCASSI A TERRA

TECHNICAL DATA / DATI TECNICI



IP67



5W / 9W / 9W RGBW



> 90



2200K / 2450K / 2700K / 3000K / 4000K / RGBW (W = 3000K)



10° / 35° / 50° / 35° RGBW



FINISHES / FINITURE



.03

Stainless steel
AISI316L



.10


Aged solid brass



.21

Pre-aged solid brass


TECHNICAL DRAWING / DISEGNO TECNICO

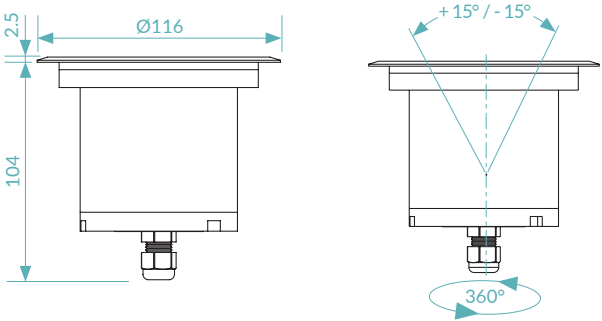

measure unit / unità di misura: mm

PRODUCT CODE / CODICE PRODOTTO

C120D = CALIBER 120 D



Select one component from each column to specify a complete configuration:
Seleziona un componente per ogni colonna per la configurazione completa:

LED colour / Colore LED	Optics / Ottiche	Finish / Finiture	Power / Potenza
22 = 2200K 25 = 2450K 27 = 2700K 30 = 3000K 40 = 4000K FC = RGBW (W = 3000K)	N = 10° M = 35° (35° RGBW) W = 50°	03 = Stainless steel AISI316L 10 = Aged solid brass 21 = Pre-aged solid brass	05 = 5W 09 = 9W CC = 4x700mA RGBW

Standard configuration example:
Esempio di configurazione standard:

C120D.30.N.03.09 | Caliber 120 D 3000K 10° optics stainless steel 9W

