

STIX BLADE

WALL SURFACE / APPLIQUE

TECHNICAL DATA / DATI TECNICI



IP65



2W (Mono emission / *Mono emissione*)
4W (Bi-emission) / *Bi emissione*



230Vac
DALI-2 - Dimmable / *Dimmerabile*



> 90



2200K / 2700K / 3000K / 4000K



3° (Light Blade)



HEAD DETAIL / DETTAGLIO DELLA TESTA



FINISHES / FINITURE




.05

Black anodized



.16

Flamed bronze



.26

Bronze anodized



.27


Dune



.29

Brushed moon

TECHNICAL DRAWING / DISEGNO TECNICO

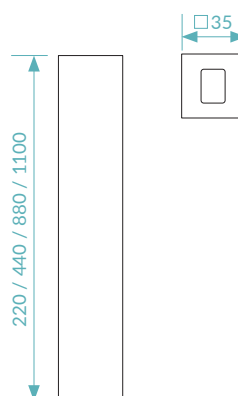

measure unit / unità di misura: mm

PRODUCT CODE / CODICE PRODOTTO

STB = STIX BLADE

Select one component from each column to specify a complete configuration:
 Seleziona un componente per ogni colonna per la configurazione completa:

LED colour / Colore LED	Optics / Ottiche	Finish / Finiture	Length / Lunghezza	Mount / Attacco	Power / Potenza	Dimming / Dim.
22 = 2200K 27 = 2700K 30 = 3000K 40 = 4000K	B0 = 3° up 0B = down 3° BB = 3° + 3°	05 = Black anodized 16 = Flamed bronze 26 = Bronze anodized 27 = Dune 29 = Brushed moon	02 = 220mm 04 = 440mm 06 = 660mm 08 = 880mm 11 = 1100mm	A = Up mount Attacco superiore B = Down mount Attacco inferiore C = Center mount Attacco centrale	02 = 2W 04 = 4W	O = On/Off D = DALI-2

Standard configuration
 example:
 Esempio di configurazione
 standard:

STB22B00504B02O | Stix Blade 2200K 3° up optic black anodized 440mm down mount / attacco inferiore 2W On/Off

