

unonovasette
VARIO COLLECTION



WHEN LIGHT MEETS EMOTIONS



VARIO 100

SPOTLIGHT OUTDOOR

TECHNICAL DATA

-  IP66
-  15W / 20W
-  CRI > 90
-  2200K / 2450K / 2700K / 3000K / 4000K
-  10° / 20° / 40° / 55° / 10°x45°
-  Ø94 H120 L94.5mm




FINISHES



.01
White RAL 9003



.02
Black RAL 9005



.20
Corten



.23
Moss green



VARIO 60

SPOTLIGHT OUTDOOR

TECHNICAL DATA

-  IP66
-  6W / 9W / 14W /
9W RGBW / 12W DW
-  CRI > 90
-  2200K / 2450K / 2700K /
3000K / 4000K / RGBW / DW
-  10° / 30° / 50° / 10°x45° / 45°x10° /
35° RGBW / 20° DW / 40° DW
-  Ø62 H87 L112 mm



FINISHES



.01

White RAL 9003



.05

Black anodized



.07

Natural anodized



.10

Aged solid brass



.21

Pre-aged solid brass



.23

Moss green



Project: Franz Josefs Kai 89, Vienna
Lighting design: Studio 30 Grad



Project: The BoTree Hotel in Marylebone, London
Lighting design: dpa lighting consultants

VARIO 40

SPOTLIGHT OUTDOOR

TECHNICAL DATA

-  IP66
-  2,6W / 3,6W
-  CRI > 90
-  2200K / 2450K / 2700K / 3000K / 4000K / Amber (590nm)
-  10° / 23° / 43° / 10°x40° / 40°x10°
-  Ø45 H71 L102 mm



FINISHES



.01
White RAL 9003



.05
Black anodized




.07
Natural anodized



.10
Aged solid brass



.21
Pre-aged solid brass



.23
Moss green



VARIO 25

SPOTLIGHT OUTDOOR

TECHNICAL DATA

-  IP66
-  2,6W
-  > 90
-  2200K / 2450K / 2700K / 3000K / 4000K / Amber (590nm)
-  12° / 21° / 31° / 46° / 13°x36° / 36°x13°
-  Ø26 H51.5 L70 mm
(L85 Snoot 45° / L85 Snoot Tube)



FINISHES



.05

Black anodized



.16

Flamed bronze



.26

Bronze anodized



VARIO 33 ZOOM

SPOTLIGHT OUTDOOR

TECHNICAL DATA

-  IP66
-  2W
-  CRI > 90
-  2200K / 2700K / 3000K / 4000K / Amber (590nm)
-  6° / 52°
-  Ø33 H70 L74 mm



FINISHES



.05

Black anodized



.10

Aged solid brass



.21

Pre-aged solid brass



VARIO 60 P HV

SURFACE MOUNTED
DOWNLIGHT OUTDOOR

TECHNICAL DATA

-  IP66
-  9W
-  > 90
-  2200K / 2450K / 2700K / 3000K / 4000K
-  10° / 30° / 50° / 10°x45°
-  Ø62 H130 mm



FINISHES



.01
White RAL 9003



.16
Flamed bronze



.05
Black anodized



.20
Corten



.07
Natural anodized



.23
Moss green

VARIO 40 P

SURFACE MOUNTED
DOWNLIGHT OUTDOOR

TECHNICAL DATA

-  IP66
-  2,6W / 3,6W
-  > 90
-  2200K / 2450K / 2700K / 3000K / 4000K / Amber (590nm)
-  10° / 23° / 43° / 10°x40°
-  Ø45 H120 mm





VARIO 60 S HV

SURFACE MOUNTED
PENDANT OUTDOOR

TECHNICAL DATA

-  IP66
-  9W
-  CRI > 90
-  2200K / 2450K / 2700K / 3000K / 4000K
-  10° / 30° / 50° / 10°x45°
-  Body: Ø62 H130 mm
Ceiling rose: Ø62 H60 mm



VARIO 40 S

SURFACE MOUNTED
PENDANT OUTDOOR

TECHNICAL DATA

-  IP66
-  2,6W / 3,6W
-  CRI > 90
-  2200K / 2450K / 2700K / 3000K / 4000K / Amber (590nm)
-  10° / 23° / 43° / 10°x40°
-  Body: Ø45 H120 mm
Ceiling rose: Ø62 H60 mm



FINISHES



.01

White RAL 9003



.05

Black anodized



.07

Natural anodized



.16

Flamed bronze



.20

Corten



.23

Moss green





VARIO 60 DUO HV

BOLLARD

TECHNICAL DATA


-  IP66
-  10W On/Off
10W DALI
-  CRI > 90
-  2200K / 2450K / 2700K /
3000K / 4000K
-  10° / 30° / 50° / 10°x45° / 45°x10°
-  Projector: Ø62 H87 L112 mm
Bollard: Ø50 H600 / 900 mm



FINISHES



.05
Black anodized




.20
Corten



.23
Moss green



.27
Dune



.32
Warm brown



VARIO 60 MONO HV

BOLLARD

TECHNICAL DATA

-  IP66
-  5W On/Off
5W DALI
-  CRI > 90
-  2200K / 2450K / 2700K /
3000K / 4000K
-  10° / 30° / 50° / 10°x45° / 45°x10°
-  Projector: Ø62 H87 L112 mm
Bollard: Ø50 H600 / 900 mm



FINISHES



.05
Black anodized




.20
Corten



.23
Moss green




.27
Dune



.32
Warm brown



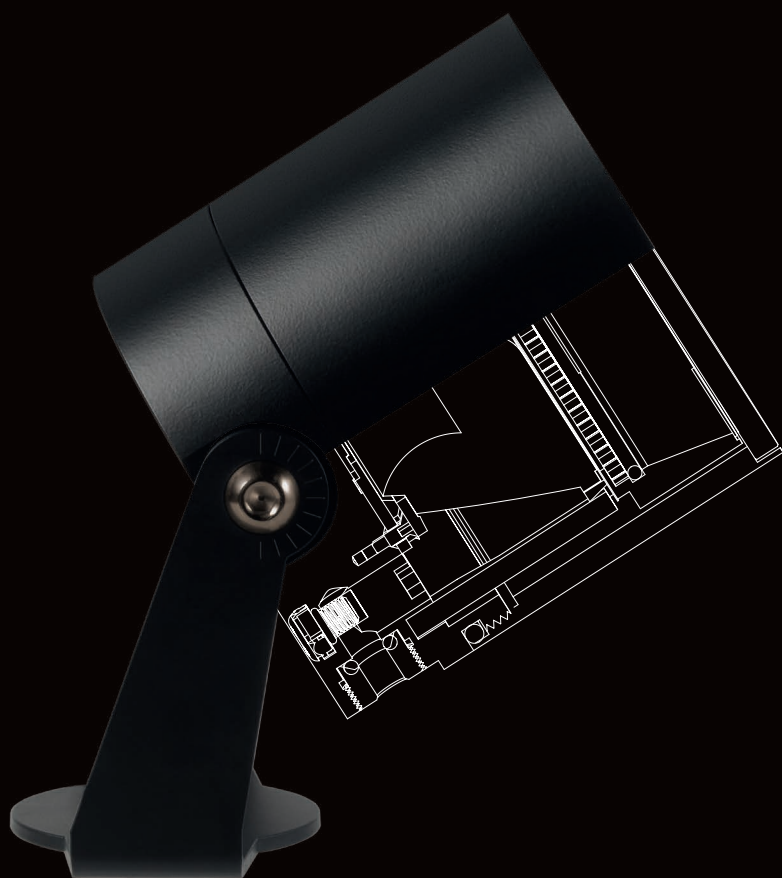

_CONTEMPORARY DESIGN

_FLEXIBLE

_STYLISTIC CONTINUITY

_HIGH PERFORMANCE

respect the dark

2026_07